



P243S

Multi-End Roving for Translucent Panel


PRODUCT DESCRIPTION

P243S is a multi-end roving, manufactured from a collection of continuous glass strands which are gathered, without mechanical twist, into a single bundle. The roving is then wound and shipped as a tubeless package ready for use at customer operations. P243S roving is manufactured with state-of-the-art equipment, innovative chemistry and with a major commitment to statistical process control. OCV Reinforcements uses a Quality Management System certified to meet ISO 9002 standards.



PRODUCT APPLICATION

P243S is a multi-end E-glass roving, designed for chopping applications with various types of chopping machines. P243S has a sizing system with silane coupling agents. Thanks to its outstanding properties, P243S has been designed to provide optimal performances in chopping applications, such as:

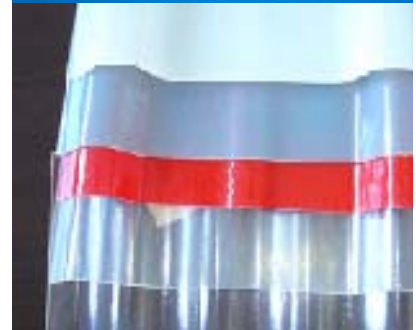

- Translucent panel
- Complex and felts

FEATURES AND PRODUCT BENEFITS

- Easy chopping for extended blade life
- Excellent translucency of laminates with all usual resin systems.
- Low static, fuzz and fly for a cleaner work environment
- Very good mechanical properties
- Excellent dispersion for laminate uniformity

TECHNICAL CHARACTERISTICS (nominal values)

Linear weight of roving(TEX)	Loss on Ignition (%)	Moisture (%)
ISO 1889 : 1987	ISO 1887 : 1995	ISO 3344 : 1977
2400	0.58	<0.15

P243

Multi-end Roving for Translucent Panel

PRODUCT AVAILABILITY (standard ref.)

Identification Number	Bare glass linear density(tex)	Approx. pkg weight(kg)	Available Package
EC 2400 P243S	2400	20	Bulk Pack, Creel-Pak

Note: E : Type of glass
C : Type of process, continuous
P243S : OCV Reinforcements code for sizing system

PACKAGING AND PALLETIZATION (standard reference)

Pallet Dimensions

Pallet Height, cm (in)	95 (37)
Pallet Length, cm (in)	114 (45)
Pallet Width, cm (in)	114 (45)
Pallet Weight, net, kg (lb)	960 (2116)
Number of layers	3
Package per pallet	48

Package Dimensions

Package Height, cm (in)	26.5(10)
Package Diameter, cm (in)	28(11)
Package Weight, kg (lb)	20 (44)

STORAGE

Unless otherwise specified, it is recommended to store glass fibre products in a cool dry area. Temperature should not exceed 35°C and the relative humidity should be kept below 75 %. Glass fibre products must remain in packaging material until just prior to its use. If these conditions are respected, glass fibre products should not undergo significant changes when stored for extended periods of time.

The packaging system is designed to allow stacking of two pallets. When stacking two high, care should be taken to correctly and smoothly place the top pallet. Owens Corning is not responsible for any damage resulting from stacking pallets higher than two high.



OCV™ Reinforcements

**OWENS CORNING
COMPOSITE MATERIALS, LLC**
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO 43659
+1.800.GET.PINK™
www.owenscorning.com
www.ocvreinforcements.com

**EUROPEAN OWENS CORNING
FIBERGLAS, SPRL.**
166, CHAUSSÉE DE LA HULPE
B-1170 BRUSSELS
BELGIUM
+32.2.674.82.11

**OWENS CORNING
SHANGHAI COMPOSITES CO. LTD.**
OLIVE L.V.O. MANSION, 2ND FLOOR
620 HUASHAN ROAD
SHANGHAI 200040
CHINA
+86.21.6248.9922

This information and data contained herein is offered solely as a guide in the selection of a reinforcement. The information contained in this publication is based on actual laboratory data and field test experience. We believe this information to be reliable, but do not guarantee its applicability to the user's process or assume any responsibility or liability arising out of its use or performance. The user agrees to be responsible for thoroughly testing any application to determine its suitability before committing to production. It is important for the user to determine the properties of its own commercial compounds when using this or any other reinforcement. Because of numerous factors affecting results, we make no warranty of any kind, express or implied, including those of merchantability and fitness for a particular purpose. Statements in this publication shall not be construed as representations or warranties or as inducements to infringe any patent or violate any law safety code or insurance regulation.

Pub. No. 10010185-A. Owens Corning reserves the right to modify this document without prior notice. © 2009 Owens Corning.

MultiEndRov_P243S_AP_09-2008_REV1